## Transboundary unconfined alluvial aquifers (Slovenia - Croatia)

Buškulić, Patricia; Parlov, Jelena; Kovač, Zoran; Rman, Nina

Source / Izvornik: Transboundary aquifers: challenges and the way forward: book of abstracts, 2021, 141 - 142

Conference paper / Rad u zborniku

Publication status / Verzija rada: Published version / Objavljena verzija rada (izdavačev PDF)

Permanent link / Trajna poveznica: https://urn.nsk.hr/urn:nbn:hr:169:111974

Rights / Prava: Attribution-ShareAlike 3.0 Unported/Imenovanje-Dijeli pod istim uvjetima 3.0

Download date / Datum preuzimanja: 2025-02-06



Repository / Repozitorij:

<u>Faculty of Mining, Geology and Petroleum</u> Engineering Repository, University of Zagreb







### ISARM2021

2<sup>nd</sup> International Conference

# **Transboundary Aquifers**

Challenges and the way forward



Published in 2021 by the United Nations Educational, Scientific and Cultural Organization, 7, place de Fontenoy, 75352 Paris 07 SP, France

© UNESCO 2021

Reference number SC/HYD/GW/2021/1



This publication is available in Open Access under the Attribution-ShareAlike 3.0 IGO (CC-BY-SA 3.0 IGO) license (http://creativecommons.org/licenses/by-sa/3.0/igo/). By using the content of this publication, the users accept to be bound by the terms of use of the UNESCO Open Access Repository (http://www.unesco.org/open-access/terms-use-ccbysa-en).

The designations employed and the presentation of material throughout this publication do not imply the expression of any opinion whatsoever on the part of UNESCO concerning the legal status of any country, territory, city or area or of its authorities, or concerning the delimitation of its frontiers or boundaries.

The ideas and opinions expressed in this publication are those of the authors; they are not necessarily those of UNESCO and do not commit the Organization.

Cover photo: MAGNIFIER / Shutterstock.com

Photographs: Shutterstock Graphic design: UNESCO Cover design: UNESCO Typeset: UNESCO

# ISARM2021

2<sup>nd</sup> International Conference

# Transboundary Aquifers

Challenges and the way forward

**06 - 09 December 2021 / UNESCO, Paris** 

## Transboundary unconfined alluvial aquifers (Slovenia - Croatia)

### Patricia Buškulić<sup>1</sup>, Jelena Parlov<sup>1</sup>, Zoran Kovač<sup>1</sup>, Nina Rman<sup>2</sup>

Transboundary groundwater resources are very important sources of water for different uses and represent a significant role in some region, although monitoring and management are an major issue (Ganoulis, 2007). The Bregana – Obrežie (Slovenia) / Sava – Samobor (Croatia) aquifers were identified by the International Network of Water-Environment Centres for the Balkans (INWEB) inventory as transboundary aguifers. The Bregana – Obrežje aquifer is in hydraulic connection with upstream Krško and Čatež aguifers (Slovenia) and they extend along the Sava River from Krško to the Slovenia Croatia national border. Sava – Samobor aquifer (or Samobor – Zaprešić aquifer) stretches from the national border till the Zagreb aquifer. Bregana – Obrežje aquifer covers an area of 4 square kilometers whereas Sava – Samobor aquifer covers 54 square kilometers. Those aquifers form a single hydraulic system, i.e. a transboundary unconfined alluvial aguifer system that spreads along the Sava River. These areas were formed in the same geological period by the same deposition mechanisms and they  $(a,r,b,e_{n},h_{n},h_{n},\theta_{s}-\theta_{s},\alpha,n,K_{s})$  are hydraulically connected by groundwater and surface water flows. Aguifers consist of Quaternary sediments mainly composed of sand and gravels with a very thin surface deposits. Sediments were deposited during the Middle and Upper Pleistocene (lacustrine-marshy deposits) and Holocene (alluvial deposits) (Velic and Saftic, 1991; Velic and Durn, 1993). Hydraulic conductivity of the aguifers varies from 0.002 to 0.043 m/s. Saturation thickness at low waters ranges from 2 to 10 m in the Slovenian part and from 4 to 42 m in the Croatian part, while during high waters it is 2 to 12 m in the Slovenian part and 4 to 46 m in the Croatian part. Sava River is in direct hydraulic connection with the aguifers and represents the main source of recharge. Fluctuations in the Sava River water levels dominantly influence the changes in groundwater levels. During high waters, the Sava River gives water to the aquifers, while during low and medium waters it drains the aguifers in some parts (Posavec, 2006). The exception is the northwestern area between Krško and the Nuclear power plant Krško, where the Krško aquifer discharges into the Sava River most of the year (Barešic et al., 2020). The general groundwater flow direction is from west to east or south-east, which coincides with the Sava River flow direction. Groundwater flow velocities vary from 8 to 28 m/day (conservative approach with an effective porosity value of 10%). The lateral boundary conditions of the aquifer system are inflow boundary in the north near Krško, no flow (impermeable) boundaries in the northeast and southwest, and outflow boundary near Podsused. Groundwater inflows, along the national border, fluctuate significantly and depend on hydrological conditions. The hydraulic connection between these aquifers exists during the lowest waters and it is never disturbed. Different problems arising in transboundary groundwater resources monitoring and management, such as lack of common monitoring systems, limited data sharing between neighboring countries, data interpretation, data modelling and a lack of political willingness for collaboration (Ganoulis, 2007). The significant detected problem is changes in groundwater levels

<sup>1</sup> Faculty of Mining, Geology and Petroleum Engineering, University of Zagreb, Croatia

<sup>2</sup> Geological Survey of Slovenia, Slovenia

in Zagreb and Samobor – Zaprešic aquifer. One of the major cause of lowering of groundwater levels is deepening of the Sava riverbed, influenced by construction of hydroelectric power plants on the Sava River upstream from the city of Zagreb, river regulation and gravel exploitation. The main goal is to set up a cooperative framework so that institutions from both sides can effectively work together and ensure effective monitoring and management of transboundary aguifers (Ganoulis, 2007).

#### References


Barešić, J., Parlov, J., Kovač, Z. and Sironić, A. (2020): Use of nuclear power plant released tritium as a groundwater tracer. The Mining-Geology-Petroleum Engineering Bulletin, 25–35, doi: 10.17794/rgn.2020.1.3.

Ganoulis, J. (2007): Integrated Management of Transboundary Aquifers in Southeastern Europe. A report within GEF IW: LEARN Activity D2. GWP-Med, UNESCO Chair and Network INWEB, Thessaloniki.

Posavec, K. (2006): Identifikacija i prognoza minimalnih razina podzemne vode zagrebačkoga aluvijalnog vodonosnika modelima recesijskih krivulja. PhD Thesis, Faculty of Mining, Geology and Petroleum Engineering, University of Zagreb, Zagreb.

Velić, J. and Saftić, B. (1991): Subsurface Spreading and Facies Characteristics of Middle Peistocene Deposits between Zaprešić and Samobor. Geološki vjesnik 44, 69–82.

Velić, J. and Durn, G. (1993): Alternating Lacustrine-Marsh Sedimentation and Subaerial Exposure Phases during Quaternary: Prečko, Zagreb, Croatia. Geologia Croatica 46/1, 71–90, doi: 10.4154/GC.1993.06.

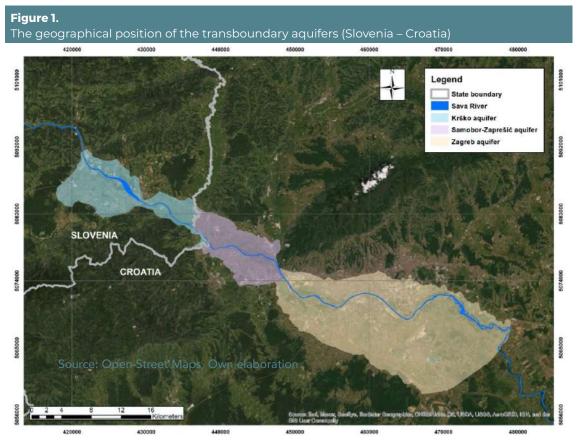

Source: Open Street Maps, Own elaboration