

# Prediction of concentration of toxic gases produced by detonation of commercial explosives by thermochemical equilibrium calculations

---

Suceska, Muhamed; Stimac Tumara, B.; Skrlec, Vinko; Stankovic, Sinisa

Source / Izvornik: **Defence Technology, 2021**

Journal article, Accepted version

Rad u časopisu, Završna verzija rukopisa prihvaćena za objavljivanje (postprint)

<https://doi.org/10.1016/j.dt.2021.10.011>

Permanent link / Trajna poveznica: <https://um.nsk.hr/um:nbn:hr:169:286212>

Rights / Prava: [Attribution-NonCommercial-NoDerivatives 4.0 International](#)/[Imenovanje-Nekomercijalno-Bez prerada 4.0 međunarodna](#)

Download date / Datum preuzimanja: **2025-03-26**



Repository / Repozitorij:

[Faculty of Mining, Geology and Petroleum Engineering Repository, University of Zagreb](#)





# Prediction of concentration of toxic gases produced by detonation of commercial explosives by thermochemical equilibrium calculations

Muhammed Suceška, B. Stimac Tumara\*, Vinko Skrlec, Sinisa Stankovic

University of Zagreb, Faculty of Mining, Geology and Petroleum Engineering, Pierottijeva 6, 10 000, Zagreb, Croatia

## ARTICLE INFO

### Article history:

Received 30 July 2021

Received in revised form

27 September 2021

Accepted 27 October 2021

Available online xxx

### Keywords:

Mining

ANFO

Emulsion explosive

Toxic fumes

Thermochemical code

EXPLO5

## ABSTRACT

An adverse effect resulting from explosive mine blasts is the production of toxic nitrogen oxides (NO and NO<sub>2</sub>) and carbon monoxide (CO). The empirical measurements of the concentration of toxic gases showed that it depends not only on the composition of an explosive and properties of its ingredients but also on several other parameters, such as volume of blasting chamber, explosive charge mass and design, confinement characteristics, surrounding atmosphere, etc. That explains why measured concentrations of toxic gases reported in literature significantly differ.

In this paper, we discuss the possibility of theoretical prediction of the concentration of toxic gases by thermochemical equilibrium calculation applying two models: ideal detonation model and deflagration model. It can be demonstrated that thermochemical calculations can provide a good estimation of the measured concentrations and reproduce experimentally obtained effects of additives on the production of toxic gases. It was also found that the ideal detonation model applies to heavily confined explosive charges, while the deflagration model is more suitable for low detonation velocity explosives with light confinement.

© 2021 China Ordnance Society. Publishing services by Elsevier B.V. on behalf of KeAi Communications Co. Ltd. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

## 1. Introduction

Blasting, heavily used in civil engineering and mining industry, has some negative impacts on the environment and workforce. In addition to direct physical adverse effects, such as vibrations, air blast, and flyrock, the blasting of commercial explosives produces some toxic gaseous detonation products within a detectable range of concentrations [1,2]. When dealing with ammonium nitrate (AN) based commercial explosives (ANFO, emulsion, and their blends) the main detonation products are water (H<sub>2</sub>O), carbon dioxide (CO<sub>2</sub>), and nitrogen (N<sub>2</sub>). However, some amounts of toxic nitrogen dioxide (NO<sub>2</sub>), nitrogen monoxide (NO), and carbon monoxide (CO) are also formed, depending on the composition of the explosive and blasting conditions [3–10].

Gases like NO and NO<sub>2</sub> are toxic and can cause serious health risks to the personnel exposed, with NO<sub>2</sub> being about five times more toxic than NO [9,11,12] with different minimum lethal doses. The concentration of 805 ppm of NO<sub>2</sub> will cause lethal reflex choking after 15 s of exposure, while 8000 ppm of NO will result in

sudden unconsciousness followed by death after 60 s exposure [7]. Carbon monoxide (CO) is an asphyxiating gas [13] that cannot be detected by sight or smell [14]. Even though CO is not dangerous in open pit excavation, its danger lies in its possibility to migrate through the ground and collect in enclosed spaces causing carbon monoxide poisoning [2,14].

The production of toxic gases is usually studied through experimental measurements of the concentration of gases produced by detonation of an explosive charge in a blasting chamber [5]. The experiments reported in the literature differ vastly in terms of the quantity of explosive charge, the volume of the blasting chamber, presence and type of confinement used. Laboratory tests, such as Ornellas' detonation calorimetry [15] and Crawshaw-Jones test [16] involve smaller quantities of explosives (30 g and 450 g, respectively) and smaller chamber volumes (5.3 dm<sup>3</sup> and 50 dm<sup>3</sup>, respectively) which makes them unsuitable for highly non-ideal explosives, such as explosives based on ammonium nitrate (AN).

One of the earliest large-scale experiments conducted with ANFO was done by Chaiken et al. [16]. The authors used a large closed system (cylindrical steel chambers with a volume of about 72 m<sup>3</sup> and about 0.5 kg of explosive charge encased in a glass tube). Similar work was done by Mainiero [5], Rowland and Mainiero [8],

\* Corresponding author.

E-mail address: [barbara.stimac@rgn.hr](mailto:barbara.stimac@rgn.hr) (B. Stimac Tumara).

Peer review under responsibility of China Ordnance Society

Rowland et al. [12], Sapko et al. [9], and Mainiero et al. [6], where a large chamber (section of a mine with an approximate volume of 274 m<sup>3</sup>) was used along with light and heavily confined explosive charge each weighing about 4.5 kg. Attempts to standardize the method of determination of toxic gases resulted in a European standard ('EN 13631-16:2004', [17]) which recommends using chambers at least 15 m<sup>3</sup> in volume and a minimum explosive charge mass of 0.5 kg placed in a glass tube. The chamber is equipped with temperature and pressure probes and equipment for continuous measurement of CO, CO<sub>2</sub>, NO, and NO<sub>2</sub> concentrations [3,10,18,19].

Numerous factors affect the measured concentration of toxic gases: oxygen balance, presence of additives, nature, and stability of the explosive ingredients, presence and type of confinement, the way of priming, water resistance of the explosive, the reactivity of the detonation products with the surroundings, non-ideal detonation characteristics, etc. It was shown that the oxygen balance of an explosive plays the most important role in CO and NO<sub>x</sub> production; oxygen-deficient formulations produce more CO and less NO<sub>x</sub> [3,8,9,16,20]. Biessikirski et al. [3] found that not only the percentage of AN but also the absorption index of its prills have an effect on the resulting gases; the larger the absorption index, the slower the detonation velocity and a lower concentration of toxic gases was observed. Rowland & Mainiero [8], Onederra et al. [7], and Sapko et al. [9] found that the degree of confinement affects NO<sub>x</sub> and NH<sub>3</sub> production but does not play an important role in CO production. In the case of ANFO, light confinement results in increased NO<sub>x</sub> concentration, which the authors attributed to increased non-ideal behavior. The authors also found that additives in ANFO (such as excess fuel, water, aluminum powder, etc.) affect CO and NO<sub>x</sub> concentrations. In addition, explosive charge diameter affects the production of toxic gases for both ANFO [8] and emulsion explosives [19]. The volume of CO and NO<sub>x</sub> increases with a decrease in charge diameter and strength of confinement. Maranda et al. [18], Rowland & Mainiero [12], Sapko et al. [9], and Harris et al. [11] state that oxygen from surrounding air may oxidize NO to NO<sub>2</sub> hence measured NO concentration decreases with time. The aforementioned suggests that the concentration measured under one experimental setup tells us a little about the concentration produced under different experimental conditions [9].

Based on available literature data, theoretical calculation of the concentration of toxic gases has not been widely reported. In the work of Chaiken et al. [16], the thermochemical code TIGER, based on the Chapman-Jouguet (C-J) detonation theory, was used for the prediction of detonation properties and product concentrations of ANFO explosives. The authors found that calculated concentrations were not in exact agreement with experimental data but could approximate the trends observed with compositional variations. De Souza and Katsabanis [4] used TIGER, BKW thermochemical codes, and C-J detonation theory to predict concentrations of toxic gases of a series of ANFO and emulsion explosives. The authors found that the calculated and experimental concentrations were in reasonable agreement, except for NO in the negative oxygen balance region and CO in the positive oxygen balance region.

This work aims to test the applicability of the C-J detonation model supplemented with a more accurate equation of state of the gas products and test the applicability of the deflagration explosion model to commercial explosives.

## 2. Numerical modeling of effects on concentration on production of toxic gases

### 2.1. Description of the calculation model

A comprehensive study of the production of toxic gases under

mining conditions should consider all the processes involved; detonation, formation of detonation products, expansion, and cooling of the products, mixing with surrounding atmosphere followed by kinetically controlled post-detonation reactions. The thermochemical calculations can provide information on the initial composition and concentration of detonation products but cannot address how concentrations change in kinetically controlled post-detonation reactions with atmospheric oxygen.

In this study calculations are performed using EXPO5 thermochemical code [21], applying two calculation models: a) the C-J detonation model and b) the deflagration model. The accuracy of the calculation of detonation parameters, including the concentration of detonation and combustion products, has so far been tested on many explosives and the results have been presented in several papers [22–26]. Generally, detonation velocity can be predicted with the root mean square (RMS) error below 3% and detonation pressure with RMS square below 6% [25], while the calculated concentration of detonation products reproduces very well those obtained by detonation calorimetry [22].

The C-J detonation theory assumes an explosive instantaneously transforms reactants into detonation products which are initially under high temperature ( $T$ ) and pressure ( $p$ ). Under such conditions, the state of equilibrium establishes instantaneously, and the concentration of individual products is determined by the state of equilibrium at a given  $p$ ,  $T$ ,  $V$  state. In other words, concentration is thermodynamically controlled and can be calculated by solving thermodynamic equations between detonation products [21,27]. After formation, the products expand isentropically and since they are still hot, they can react with each other. As the result, the concentration of products changes with time. Below a certain temperature, the so-called freeze-out temperature (typically 1800–2250 K) [27,28], the rate of reactions becomes too slow, so a state of equilibrium cannot be established quickly. Thus, below the freeze-out temperature, the product concentration is assumed to remain unchanged.

Kinetic analysis of some elementary reactions between combustion products in an internal combustion engine, described in Chaiken et al. [16], showed that within 5 ms of piston expansion, the concentration of NO at 2665 K remained at its initial value, while the concentration of CO reduced to about 50% of its initial value. This indicates that rates of equilibrium reactions of the reduction of NO to N<sub>2</sub> and oxidation of CO to CO<sub>2</sub> cannot keep pace with the cooling effects during the expansion. Based on this, it is assumed that the concentrations of CO and NO<sub>x</sub> remain relatively unchanged during the isentropic expansion of detonation products to atmospheric conditions. Thus, the concentrations of CO and NO<sub>x</sub> can be predicted by calculating their concentrations at the C-J state using a suitable thermochemical code. Our ideal detonation model is based on this assumption.

It was suggested by Barnhart (described in Onederra et al. [7]) that increased production of NO<sub>x</sub> in fuel-lean ANFO formulations can be better described by the deflagration model. Generally, this model seems applicable in all cases where reaction time is longer (i.e., slower detonation velocities). In the deflagration model, the calculation was performed using the constant volume combustion module incorporated in the EXPO5 code. The model requires blasting chamber volume and mass of explosive to be specified by the user. In addition, the model allows the atmosphere which fills the chamber (or some fraction of it) to take place in the combustion reaction.

#### 2.1.1. Effect of the equation of state on the production of toxic gases

The equation of state (EOS) of gaseous detonation products plays a key role in determining the accuracy of the calculated detonation parameters and concentrations of detonation products [27,29,30].

Therefore, we started this study with the analysis of the effects of EOS on calculated detonation parameters of ANFO explosives. In the analysis, we studied two EOS incorporated in EXPLO5; Becker-Kistiakowsky-Wilson (BKW) [23,31] and EXP-6 equations of state [30]. BKW EOS is a semi-empirical, while EXP-6 is a theoretically grounded EOS, based on the Buckingham  $\alpha$ -exponential-6 equation and an analytical representation of the excess thermodynamic functions for a classical fluid mixture. The interaction potential parameters in EXP-6 EOS for CO, NO, NO<sub>2</sub>, and N<sub>2</sub>O are taken from Refs. [32,33], which we found most accurately describe the detonation behavior of a series of ideal explosives [30]. Values of covolumes in BKW EOS of these gases are taken from Refs. [21,27,29] and slightly modified to reproduce concentrations calculated by EXP-6 EOS (Table 1). For other detonation products, parameters from the built-in database in EXPLO5 database are used [21,30].

EXP-6 EOS predicts lower detonation velocity and pressure of ANFO than BKW EOS (by about 6.5% and 17%, respectively). Both EOSes give almost the same concentrations of detonation products (Table 2). In further calculations, we used BKW EOS since it predicts detonation velocity and pressure closer to experimental values reported in the literature [34]. The covolumes of NO, NO<sub>2</sub>, and N<sub>2</sub>O were modified to reproduce the concentration of these products calculated using theoretically based EXP-6 EOS (Table 2). In this way, we obtained the covolume of NO as 340 Å, which is slightly smaller compared to 394 Å reported in Refs. [27,29]. A lower covolume of NO results in a larger calculated concentration of NO; for example,  $k = 340$  Å gives 0.035 mol/kg while  $k = 394$  Å gives 0.021 mol/kg (40% difference). Similarly, we obtained a smaller covolume ( $k = 520$  Å) for NO<sub>2</sub>, compared to literature (626 Å [27] and 594 Å [29]). It follows from Table 2 that the main products of ANFO 94/6 (H<sub>2</sub>O, N<sub>2</sub>, and CO<sub>2</sub>) make up 98.3% of the total moles (volume) of gas products, while all other products, including toxic gases, make up only 1.7%.

From the expansion isentrope of detonation products (Fig. 1) with the freeze-out temperature set to 2250 K, it is clear that the concentrations of CO, NO, CH<sub>2</sub>O<sub>2</sub>, and NO<sub>2</sub> decrease in the early stages of the expansion, while CO<sub>2</sub> and N<sub>2</sub> concentrations slightly increase. This indicates that CO oxidizes to CO<sub>2</sub>, while NO reduces to N<sub>2</sub> and O<sub>2</sub>. This agrees with the analysis of Chaiken et al. [16] for high-temperature low-pressure expansion of combustion products. The freeze-out temperature of 2250 K was determined in previous work [28] as the temperature which best reproduces the experimental concentrations of detonation products for a series of explosives [15].

Unlike Chaiken et al. [16], who stated that CO concentration is frozen at 50% of its initial concentration at 2665 K, we found that the decrease in CO concentration at a freeze-out temperature of 2250 K changes with ANFO oxygen balance (OB). For OB < 0, decrease of CO concentration is 15–25%, for OB  $\approx$  0% about 5%, and about 90% at OB = 12%. For highly negative OB explosives, CO concentration can even increase during the isentropic expansion due to the oxidation of solid carbon. Thus, the assumption that CO

**Table 1**  
Parameters of toxic gases used in BKW and EXP-6 EOS.


Product	BKW EOS	EXP-6 EOS		
	covolume $k_i/(A^3 \cdot 10.46)$	$r^*/A$	$\epsilon/k_B/K$	$\alpha$
CO	390	4.16	105.5	13.2
NO	340	3.71	151.9	13.1
NO <sub>2</sub>	520	4.27	338.0	13.6
N <sub>2</sub> O	590	4.28	242.8	13.6

Legend:  $k$  - BKW covolume,  $r^*$  - separation distance,  $\epsilon$  - depth of attractive well between particles,  $\alpha$  - stiffness of the repulsive potential part of the potential,  $k_B$  - Boltzmann constant.

**Table 2**

Calculated detonation parameters and concentration of detonation products for ANFO (94/6, 0.8 g/cm<sup>3</sup>).

Detonation parameters	BKW EOS	EXP-6 EOS
Detonation velocity/(m·s <sup>-1</sup> )	4765.9	4493.2
Detonation pressure/GPa	5.042	4.284
Heat of detonation/(kJ·kg <sup>-1</sup> )	-3920.5	-3909.8
Detonation temperature/K	2948.3	3065.2
Particle velocity/(m·s <sup>-1</sup> )	1322.5	1191.8
Volume of gas at STP/(dm <sup>3</sup> ·kg <sup>-1</sup> )	1056	1057
Concentration of detonation products at the C-J point/(mol·kg <sup>-1</sup> )		
H <sub>2</sub> O	26.80655	26.76741
N <sub>2</sub>	11.72233	11.71667
CO <sub>2</sub>	3.95324	3.95257
CO	0.42330	0.42231
H <sub>2</sub>	0.21389	0.21732
NO	0.03434	0.03561
CH <sub>2</sub> O <sub>2</sub>	0.02105	0.02195
OH	0.00758	0.04827
NH <sub>3</sub>	0.00674	0.01589
O <sub>2</sub>	0.00408	0.00230
H <sub>2</sub> O <sub>2</sub>	0.00034	0.00061
N <sub>2</sub> O	0.00029	0.00032
NO <sub>2</sub>	0.00012	0.00004

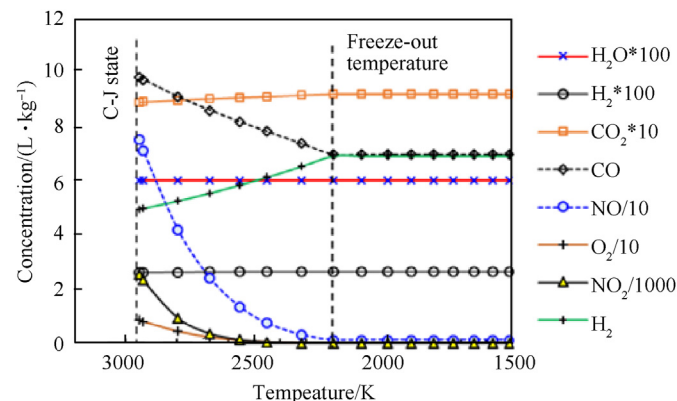

**Fig. 1.** Calculated concentrations of detonation products along expansion isentrope of ANFO 94/6.

concentrations at the freeze-out temperature roughly correspond to that at the C-J point seems valid for ANFO with OB  $\approx$  0%. The assumption is also valid for emulsion explosives whose detonation temperature of about 2200 K is below freeze-out temperature.

The concentration of NO at the freeze-out temperature is about 5% of its initial value at the C-J point. Chaiken et al. [16] stated that NO concentration is frozen at 2665 K (at  $p = 27.1$  bar). Similarly, Mainiero et al. [6], also claimed that NO concentration does not change during the expansion, unless there is an interaction with oxygen from the surrounding atmosphere (on contact with the air, NO slowly oxidizes to NO<sub>2</sub>). Our calculation results given in Table 2 show that NO concentration at the C-J point roughly corresponds to that measured, which indicates that NO concentration for ANFO is frozen at the C-J point (at 2950 K).

## 2.2. Analysis of literature reported measured concentrations of toxic gases

The measured concentrations of toxic gases for ANFO and emulsion explosives are collected from different literature sources (Table 3 and Table 4). Since these results were obtained under different experimental conditions, some key informations on



experimental conditions are also indicated. The purpose of the comparison is to highlight the differences in the results from different authors and to get a mean value of NO<sub>x</sub> and CO concentrations which could serve as validation of calculation results.

Even though the comparison of measured concentrations of toxic gases is difficult due to different experimental conditions, several facts can be elucidated from the comparison. First, there is a large difference in measured NO<sub>x</sub> and CO concentrations reported by different authors, especially for NO and NO<sub>2</sub> concentrations. The prilled ANFO measured concentrations are fairly uniform – CO concentrations ranging from 13.2 to 19.7 L/kg and from 4.7 to 13.1 L/kg for NO<sub>x</sub>. However, for pulverized ANFO, NO<sub>x</sub> concentration is more than an order of magnitude lower than for prilled (0.1–1.35 L/kg), which indicates an effect of AN characteristics on the production of toxic fumes. Concentrations of CO for emulsion explosives are slightly more scattered (from 5.3 to 21.4 L/kg, with a mean value of 11.2 L/kg) but still relatively consistent, while NO<sub>x</sub> concentrations are significantly different (0.04–2.4 L/kg, with a mean value of 1.04 L/kg). A comparison of the reported minimum and maximum concentrations shows that CO concentrations differ by a factor of approximately 1.5 times for prilled ANFO and a factor of 4 times for emulsion explosives, while NO<sub>x</sub> concentrations differ by a factor of 3 times for prilled ANFO and 60 times for emulsion explosives.

Secondly, it should be added that in the cases where the products are too diluted (large chamber volume, small sample mass) the accuracy of measurement may be affected. This is especially true for NO and NO<sub>2</sub>, which are present in small amounts, about 0.08% of the total volume of gases.

Large scattering of experimental results is usually attributed to differences in experimental conditions, however, our analysis shows that even in the cases where very similar experimental conditions are used, the difference between reported measured concentrations for CO can go up to 1.7 times, and up to 7 times for NO concentrations, while differences in NO<sub>2</sub> concentration may exceed 100 times. In our opinion, one of the most important reason behind these large discrepancies may be the reproducibility of post-detonation reactions, in particular mixing and oxidation of CO and NO with atmospheric oxygen.

### 2.3. Comparison of measured and calculated concentrations of toxic gases

The concentration of toxic gases generated by the detonation of ANFO and emulsion explosives is calculated based on models described previously:

- o Ideal detonation model (**IDM**): based on the C-J detonation theory and assumption that measured NO<sub>x</sub> and CO concentrations correspond to those in the C-J state
- o Deflagration model (**DM1**): assumes explosive deflagrates under constant volume conditions without interaction with the atmosphere, and calculated concentrations at the combustion temperature corresponds to measured concentrations
- o Deflagration model (**DM2**): a modification of DM1 which assumes detonation products react with a fraction of the surrounding atmosphere at the combustion temperature.

Although IDM seems to be the logical choice when calculating the concentration of toxic gases (since an explosive charge is initiated to detonate), deflagration models (DM1 and DM2) have a background in Barnhart's (in Onederra et al. [7]) and Ornellas' research [15]. According to Barnhart, the deflagration model is better suited to describe the increased production of NO<sub>x</sub> in cases of lower detonation velocities (when the explosive behaves more non-ideally and reactions last a longer time). According to Ornellas, the products from the detonation of unconfined charges and from deflagration in the blasting chamber are comparable since in both cases they equilibrate under conditions of high temperature and lower pressure, i.e., the concentration of the product does not correspond to those on the expansion isentrope. Therefore, unconfined charges produce more CO, H<sub>2</sub>, and NO than those confined. In the case of heavily confined charges, a large fraction of released energy converts to the kinetic and internal energy of confinement, which largely reduces reverberation of shock from the chamber walls. Consequently, detonation products from heavily confined charges correspond to those found on the expansion isentrope, in the region between C-J temperature and freeze-out temperature.

The calculations for ANFO were performed for two formulations: a generic formulation containing 94% AN and 6% fuel oil (ANFO1) and a formulation with 5.7% of fuel oil and an oxygen balance closer to zero (ANFO2). For emulsion explosives, three typical formulations are used: one AN-based emulsion and two AN and SN-based emulsions. The results of the calculation are given in Table 5 and Table 6. DM1 and DM2 calculations are done assuming a chamber volume of 15 m<sup>3</sup> and mass of explosive of 1 kg, i.e., loading density is 1/15 kg/m<sup>3</sup>. The amount of atmospheric air that participate in reactions is set to be 10% of the total mass.

Several observations can be drawn from the comparison of measured and calculated concentrations. The ideal detonation model (IDM) predicts twice less CO comparing to the measured mean value for ANFO1 (OB = -0.99%) and much less NO<sub>x</sub>. On the

**Table 3**

Literature reported measured NO<sub>x</sub> and CO concentrations for ANFO explosive.

Literature source	$\rho_0/(g \cdot cm^{-3})$	Experimental conditions	$m_e/kg$	$V_C/m^3$	$D/(km \cdot s^{-1})$	Concentration/(L·kg <sup>-1</sup> )			
						NO	NO <sub>2</sub>	NO <sub>x</sub>	CO
[8]	—	Steel pipe, $\phi 20$ cm/71 cm*	4.54	274		3.30	1.7	5.2	18.5
[16]	0.8	Prilled ANFO, LCG*	0.45	72	2.10	3.12	1.25	4.37	19.7
[3]	0.75	EN; glass tube, $\phi 46$ mm*	0.60	15	1.70	n/a	n/a	10.2	15.0
[3]	0.82	EN; glass tube, $\phi 46$ mm*	0.60	15	3.14	n/a	n/a	13.1	16.4
[4]	0.85	Explosion chamber*	0.2	1		n/a	4.7	4.7	18.8
[14]	—	Detonation calorimeter*	n/a	n/a	n/a	n/a	9.9	9.9	13.2
[16]	0.8	Pulverized ANFO, LCG**	0.45	72	3.60	n/a	n/a	1.35	9.1
[16]	0.8	Pulverized ANFO, CJ apparatus**	0.45	0.09	3.60	n/a	n/a	0.1	23.8
Range of concentrations (without pulverized ANFO data)							1.25	4.7	13.2
						3.12	9.9	13.1	19.7
Mean value (without pulverized ANFO data)						3.21	5.3	7.9	16.9

Legend: \* - charges made of prilled AN, \*\* - charges made of pulverized AN, me - mass of explosive charge, VC - volume of the chamber, LCG - large closed gallery, CJ apparatus - Crawshaw-Jones apparatus, EN - European standard "Detection and measurement of toxic gases" [17], n/a - not available.

**Table 4**Literature reported measured NO<sub>x</sub> and CO concentrations for emulsion explosive.

Explosive/Literature source	$\rho_0$ /(g·cm <sup>-3</sup> )	OB/%	Experimental conditions	$m_e$ /kg	$V_c$ /m <sup>3</sup>	$D$ /(km·s <sup>-1</sup> )	Concentration/(L·kg <sup>-1</sup> )			
							NO	NO <sub>2</sub>	NO <sub>x</sub>	CO
E-682 [19]	1.15	1.47	Glass tube, $\phi$ 27 mm	0.16	35	4.97	2.4	n/a	2.4	16.0
E-682 [19]	1.15	1.47	Glass tube, $\phi$ 46.6 mm	0.79	35	5.50	1.1	n/a	1.1	7.5
E-682 [19]	1.15	1.47	Glass tube, $\phi$ 61.5 mm	2.19	35	5.86	0.7	n/a	0.7	5.3
MWE3 [10]	–	–2.35	EN; $\phi$ 40 mm/75 cm PE tube	0.6	15	n/a	0.38	0.02	0.4	21.4
[4]	1.11	0.54	Explosive chamber	0.2	1	n/a	n/a	1.57	1.57	6.94
Dynox [14]	n/a	n/a	n/a	n/a	n/a	n/a	n/a	0.04	0.04	10.1
Range of concentrations							0.38	0.02	0.04	5.3
							2.4	1.57	2.4	21.4
Mean value							0.76	0.54	1.04	11.21

Legend: PE – polyethylene.

**Table 5**Calculated NO<sub>x</sub> and CO concentrations for ANFO explosives with two different amounts of fuel oil.

ANFO composition	Calculation model	OB/%	$T^*$ /K	$p^*$ /GPa	$D$ /(km·s <sup>-1</sup> )	Concentration (L·kg <sup>-1</sup> of explosive)			
						NO	NO <sub>2</sub>	NO <sub>x</sub>	CO
Experimental, mean values ANFO1 (94% AN/6% FO)	IDM	–0.99	2948	5.04,	4.77	3.2	5.3	7.9	16.9
	DM1	–0.99	2499	$1 \cdot 10^{-4}$		0.77	0.0027	0.77	9.48
	DM2 (10% Air)	1.44	2472	$1 \cdot 10^{-4}$		3.38	0.0006	3.38	25.05
	DM2 (10% Air)	1.44	2472	$1 \cdot 10^{-4}$		4.64	0.0011	4.64	19.00
ANFO2 (94.3% AN/5.7% FO)	IDM	0.06	2935	4.99	4.74	2.59	0.03	2.62	2.69
	DM1	0.06	2481	$1 \cdot 10^{-4}$		3.57	0.0007	3.57	20.75
	DM2 (10% Air)	2.39	2449	$1 \cdot 10^{-4}$		4.79	0.0012	4.79	13.78
	DM2 (10% Air)	2.39	2449	$1 \cdot 10^{-4}$		4.79	0.0012	4.79	13.78

Legend: IDM – ideal detonation model, DM1, DM2 – deflagration models, D – detonation velocity,  $T^*$  and  $p^*$  – detonation temperature and pressure (for IDM), and combustion temperature and maximum pressure (for DM1 and DM2).**Table 6**Calculated NO<sub>x</sub> and CO concentrations for four emulsion explosives having different compositions.

Explosive/Literature source	Calculation method	$\rho_0$ (g·cm <sup>-3</sup> )	OB/%	$T^*$ /K	$p^*$ /GPa	$D$ /(km·s <sup>-1</sup> )	Concentration (L·kg <sup>-1</sup> of explosive)			
							NO	NO <sub>2</sub>	NO <sub>x</sub>	CO
Experimental, mean value							0.76	0.54	1.04	11.21
EM120D (AN based) [35]	IDM	1.15	1.51	2154	9.98	5.81	2.66	0.62	3.28	0.005
EMSIT (AN + SN based) *		1.11	0.5	2240	7.71	5.18	2.62	0.46	3.08	0.008
E-682 (AN + SN based) [19]		1.15	–1.42	2230	8.55	5.58	0.19	0.003	0.19	0.15
EM120D (AN based) [35]	DM1		1.51	2046	$1 \cdot 10^{-4}$		0.97	$4 \cdot 10^{-4}$	0.97	11.7
EMSIT (AN + SN based) *			0.5	1833	$1 \cdot 10^{-4}$		0.47	$2 \cdot 10^{-4}$	0.47	0.25
E-682 (AN + SN based) [19]			–1.42	1949	$1 \cdot 10^{-4}$		0.08	$3 \cdot 10^{-6}$	0.08	6.96
EM120D (AN based) [35]	DM2 (10% air)		3.69	1959	$1 \cdot 10^{-4}$		1.44	$8 \cdot 10^{-4}$	1.44	0.43
EMSIT (AN + SN based) *			3.91	1761	$1 \cdot 10^{-4}$		0.71	$6 \cdot 10^{-4}$	0.71	0.078
E-682 (AN + SN based) [19]			1.01	1977	$1 \cdot 10^{-4}$		0.7	$1 \cdot 10^{-4}$	0.70	1.38

Legend: \* Kunzel, M., Personal communication (2021); all emulsion explosives are sensitized by glass micro balloons.

contrary, for ANFO2 (OB = 0.06%) the concentration of NO is quite accurately predicted, but CO is severely underestimated. Such results indicate high sensitivity of the calculations to variation in composition – a 0.3% change of fuel oil content causes changes of CO and NO<sub>x</sub> concentration by a factor of 3.5. This issue will be discussed in greater detail in the next section. The deflagration model (DM1) predicts CO concentration (25.5 L/kg for ANFO1 and 20.75 L/kg for ANFO2) and NO concentration (3.38 and 3.57 L/kg, respectively) quite accurately. DM2 results in slightly more NO and less CO than DM1, which is a consequence of the reaction between a fraction of oxygen from air with combustion products. Also, it follows from the calculation that deflagration models are not as sensitive to compositional variations as the IDM.

The findings are similar when it comes to emulsion explosives. IDM and DM2 predict NO concentration reasonably well but underestimate the CO concentration. On the other hand, DM1 predicts CO more accurately (except for EMSIT). Generally, emulsion explosives produce less NO and CO than ANFO. From a thermochemical point of view, there are two possible reasons for this.

Firstly, emulsion explosives have approximately 25% less nitrogen per kg of explosive than ANFO. Secondly, the detonation (and combustion) temperature of emulsion explosives is about 800 K lower than for ANFO (our thermochemical calculation shows that lower temperature favors the formation of CO<sub>2</sub> and N<sub>2</sub>). Unlike NO and CO concentrations, NO<sub>2</sub> concentrations cannot be predicted correctly by the models presented. DM1 and DM2 predict a negligible amount of NO<sub>2</sub>, while IDM is more accurate but still highly underestimates NO<sub>2</sub> concentration. This may be explained by the fact that NO<sub>2</sub> is produced in slow post-detonation oxidation of NO ( $2\text{NO} + \text{O}_2 \rightarrow 2\text{NO}_2$ ) by atmospheric oxygen.

The general conclusion is that DM predicts the concentration of toxic gases more accurately for both studied explosives than IDM. The difference between calculated and mean experimental values of NO and CO is still high; about 2 times for CO and 10 times for NO. However, bearing in mind that measured CO concentrations differ 1.5 times and NO<sub>x</sub> concentration almost 3 times (Tables 2 and 3), the calculated results may be considered quite acceptable. The fact that DM1 predicts more accurately the concentration of toxic gases

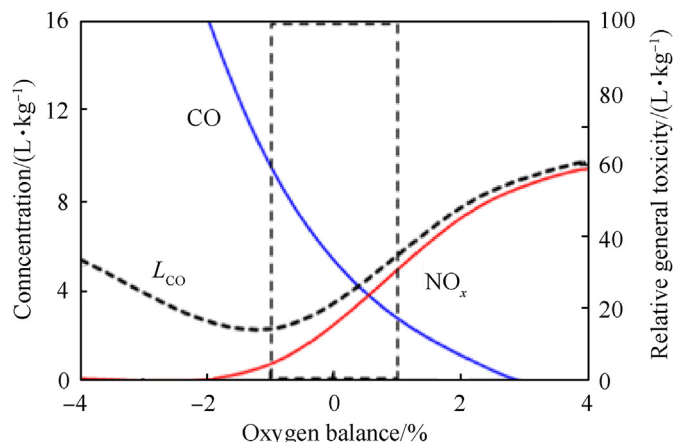


Fig. 2. Effect of oxygen balance on calculated  $\text{NO}_x$  and CO concentration for ANFO explosive (calculated by IDM).

than IDM may be somewhat surprising, particularly for emulsion explosives. However, since most tests for the determination of the concentration of toxic gases use light confinement, deflagration models better reproduce measured concentrations. This agrees with Ornellas' previously mentioned research.

#### 2.4. Effect of oxygen balance on the production of toxic gases

It is clear from the previous section that oxygen balance, i.e., fuel oil content in ANFO explosives, plays an important role in the production of toxic gases. Calculations by IDM showed that a variation in fuel oil content in ANFO from 6% to 5.4%, results in a change in OB of nearly 2%. This in turn results in a change of CO concentration from 9.48 L/kg to 2.69 L/kg and  $\text{NO}_x$  from 0.77 to 2.62 L/kg (Fig. 2). As OB increases,  $\text{NO}_x$  concentration increases while CO concentration decreases. According to Zawadzka-Małota [10], minimum relative general toxicity ( $\text{LCO} = (\text{CO} + 6.5\text{NO}_x)$ ) in obtained at slightly negative OB.

Fig. 3 shows the calculated CO and  $\text{NO}_x$  concentrations for ANFO explosive at different fuel oil contents, compared against the experimental data reported in the literature. All three calculation models give good agreement with the experimental CO data as well as the trends observed with the change of fuel oil content. Close to zero oxygen balance (at FO  $\approx 5.7\%$ ), CO concentration sharply increases with the increase of FO. In the region of fuel-lean formulations, CO concentration is low compared to measured values. Similarly, IDM predicts a sharp change of  $\text{NO}_x$  concentration at

FO  $\approx 5.7\%$ , while, in the fuel-rich region,  $\text{NO}_x$  concentrations tend to zero, which does not agree with experimental data. Both DM1 and DM2 do not predict a sharp change of  $\text{NO}_x$  and CO near-zero oxygen balance. Generally, these two models more accurately predict CO and  $\text{NO}_x$  concentrations in a broader region of FO (from 2% to 9%) than IDM.

As mentioned above, the DM2 calculations assume that a fraction of air that fills the explosion chamber takes part in a reaction at the combustion temperature. We put this fraction to be 10% of air (regarding the mass of the mixture of explosive and air) because it gives the best reproduction of experimental NO and CO concentrations for ANFO explosives. However, from Fig. 4 it follows that for emulsion explosives, this amount is lower.

The calculation shows that CO concentration decreases with an increase of air (due to its oxidation to  $\text{CO}_2$ ) for both ANFO and emulsion. The concentration of NO increases to a maximum value of about 40% of air for ANFO and 30% for emulsion explosives (i.e., at OB  $\approx 8$ –10%). The concentration of  $\text{NO}_2$  remains very low but increases with the amount of oxygen. Higher amount of air involved in reactions will give higher  $\text{NO}_x$  concentrations than measured, but underestimate CO concentrations. The amount of air that best reproduces experimental mean values of CO and  $\text{NO}_x$  concentrations is 10–15% for ANFO, and close to zero for emulsion explosives. The reason for this may be higher deflagration temperatures for ANFO (by about 500 K) and consequently faster reactions, as well as longer duration of reactions.

#### 2.5. Effect of additives and wrappers on the production of toxic gases

The approach we have described enables an approximate prediction of the composition and concentrations of toxic (and other) detonation gases. It may be particularly useful in the analysis of the effect of explosive composition on the production of toxic gases (Fig. 3). Fig. 5 gives an example of the calculated effect of additives (water content) on  $\text{NO}_x$  and CO production.

Calculations show that CO concentration increases slightly with an increase of water content, which is consistent with the experimental results of Rowland and Mainiero [8]. However, contrary to experimental results (which showed an increase of NO concentration with water content), our calculation predicts a small decrease of NO concentration. Since oxygen balance does not change significantly with the addition of water (changing the water concentration from 0% to 10%, oxygen balance changes only 0.1%), the main cause of the decrease of CO and NO concentrations may be attributed to a decrease in the detonation temperature with the addition of water (about 400 K for studied range). Lower

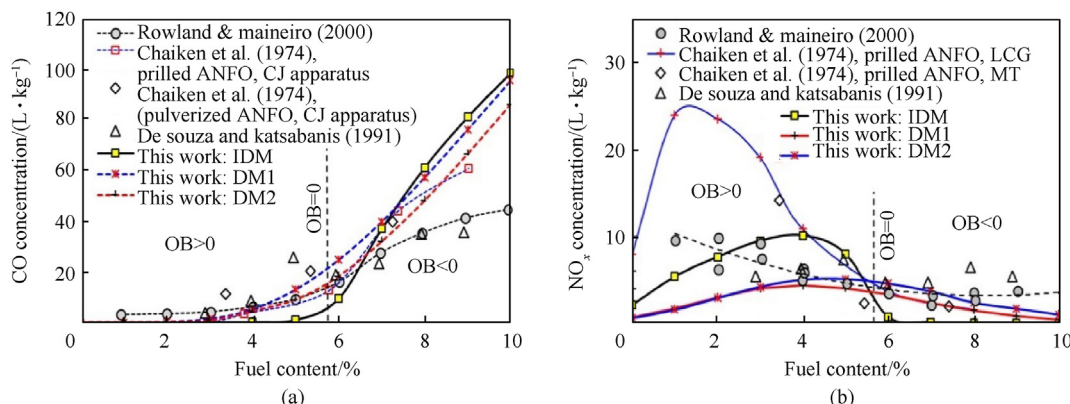


Fig. 3. Comparison of calculated and measured (a) CO and (b)  $\text{NO}_x$  concentrations for ANFO with different fuel oil content.

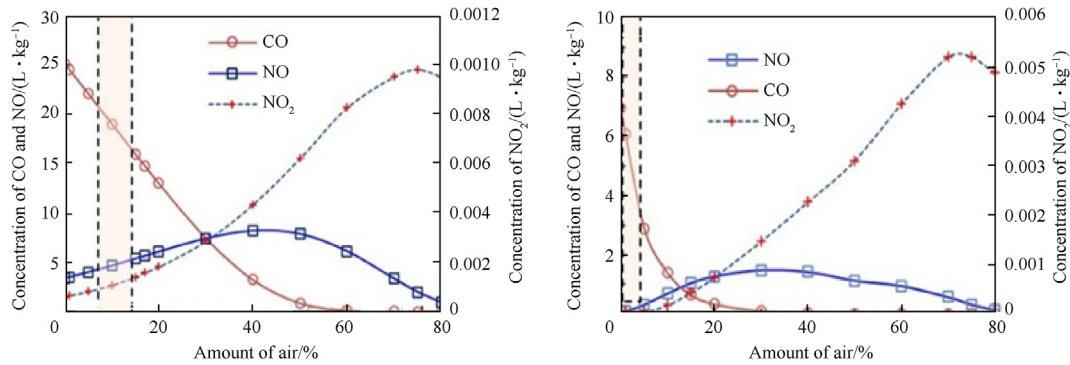


Fig. 4. Change of  $\text{NO}_x$  and CO concentration with the amount of air that takes place in reaction with a) ANFO 94/6 and b) E-682 (calculated by DM2).

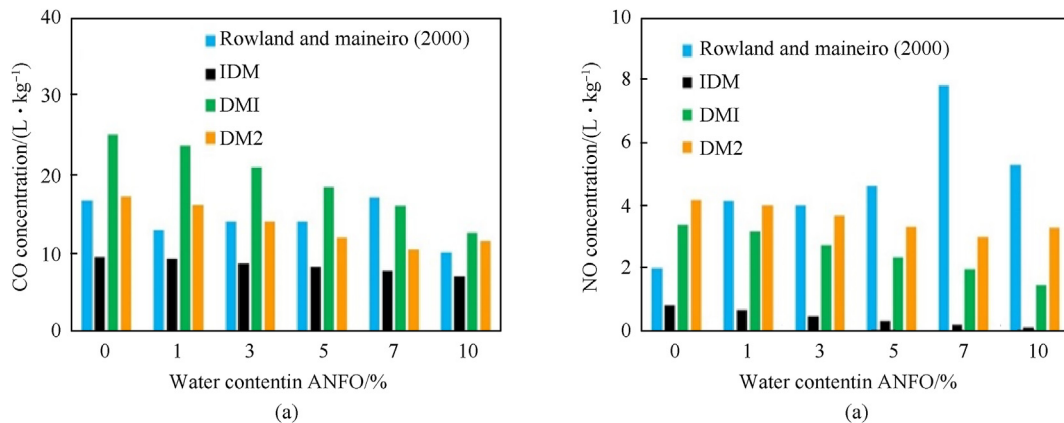


Fig. 5. Effect of water content in ANFO 94/6 on (a) CO and (b) NO concentrations.

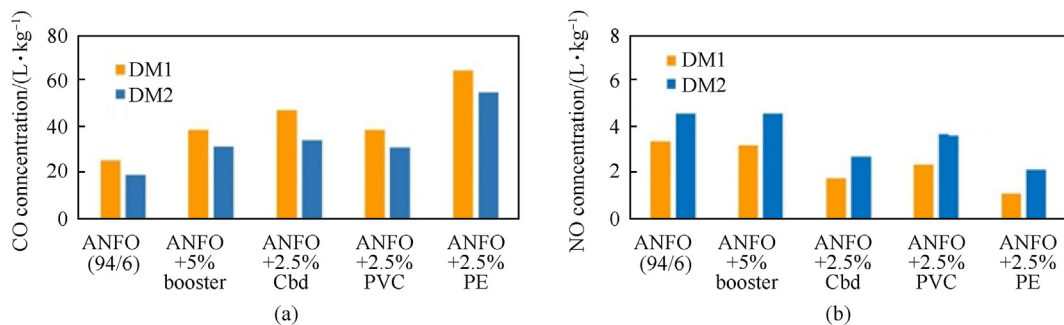


Fig. 6. Calculated effect of booster and wrapper material on (a) CO and (b) NO concentrations (Legend: PVC – polyvinyl-chloride, PE-polyethylene, cardboard – 70% lignin and 30% cellulose; Booster – pentolite booster).

temperatures favor the formation of  $\text{CO}_2$  and  $\text{N}_2$ , while higher temperatures result in more CO and NO.

The calculated effect of wrapper material on the concentration of CO and NO is illustrated in Fig. 6. The calculation was performed using DM1 and DM2 and assuming the wrapper reacts with the explosive at the combustion temperature. A small amount of wrapper material (2.5% relative to the weight of explosive charge) can double CO concentration. All wrappers studied result in a decrease of OB of explosive, particularly PE. This causes an increase in CO concentration (almost 3 times) and a decrease in NO (about 2 times). This analysis shows a large sensitivity of CO and  $\text{NO}_x$  concentration to the presence and type of wrapper and confinement used.

### 3. Conclusions

We explored the possibility of theoretical prediction of the concentration of toxic gases by thermochemical equilibrium calculations by applying two models: ideal detonation model and deflagration model. Validation of the calculations is done by comparing calculated and reported measured concentrations of  $\text{NO}_x$  and CO in the literature.

It was demonstrated that the calculation results can approximate measured concentrations quite well and reproduce the experimentally observed effect of fuel oil (i.e., oxygen balance) on the production of toxic gases. The ideal detonation model (IDM), which assumes that the calculated concentration of the products at



the C-J state corresponds to those measured experimentally, yields  $\text{NO}_x$  concentrations that agree reasonably well with the measured data, but significantly underestimates measured CO and  $\text{NO}_2$  concentrations. The IDM was found to be very sensitive to explosive composition, so a small variation in the composition may result in a significant change in CO and  $\text{NO}_x$  concentrations.

Deflagration models, which assume that the explosive deflagrates under constant volume conditions without interaction with the oxygen from the air (DM1) or that only a fraction of the oxygen takes part in reactions (DM2), predict CO and  $\text{NO}_x$  concentrations for both ANFO and emulsion explosives more accurately than IDM model. This agrees with Barnhart's assumption that deflagration seems to be a more plausible mechanism in the case of lower detonation velocity, i.e., longer duration of reactions. This is particularly true for ANFO (a highly non-ideal explosive) in which a significant fraction of unreacted explosive deflagrates during the expansion of the detonation products. In addition, findings of this work agree with Ornellas' detonation calorimetry results which showed that the concentration of detonation products from bare explosive charges (or charges with light confinement) is comparable to the concentration of deflagration products. On the other hand, the concentration of detonation products from heavily confined explosive charges should correspond to those at the freeze-out temperature on the expansion isentrope.

One of the biggest challenges when comparing calculated and measured concentrations lies in the fact that the calculation predicts the concentrations at the C-J point or at the freeze-out temperature on the expansion isentrope (IDM model) and at the combustion temperature (DM model). Meanwhile, the measured concentrations include post-detonation reactions such as oxidation of CO to  $\text{CO}_2$  and NO to  $\text{NO}_2$  by atmospheric oxygen. Under such conditions, the degree of oxidation is non-reproducible, and this is why some authors [16] even suggested that the best that can be done in any form of toxic fume test would be to accurately measure the maximum concentration of CO, before oxidation by the atmospheric air. This is the state at which the current thermochemical calculations can elucidate.

Nonetheless, with all the above-mentioned limitations, thermochemical calculations remain useful in approximating the measured concentrations of toxic gases, and they are especially relevant in compositional analysis – for example for prediction of effects of additives, wrappers, etc. on the production of toxic gases.

### Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

### Acknowledgments

This research was supported by the Croatian Science Foundation (HRZZ), Croatia, under the projects IP-2019-04-1618 "NEIDEMO".

### References

- [1] Brochu S. Assessment of ANFO on the environment - Technical Investigation 09-01. 2010.
- [2] Mainiero RJ, Harris ML, Rowland JH. Dangers of toxic fumes from blasting. In: 33rd Annual Conference on explosives and blasting technique. Tennessee: Nashville; 2007.
- [3] Biessikirski A, Pytlík M, Kuteranski L, Dworak M, Twardosz M, Napruszewska BD. Influence of the ammonium nitrate (V) porous prill assortment and absorption index on ammonium nitrate fuel oil blasting properties. *Energies* 2020;13.
- [4] De Souza EM, Katsabanis PD. On the prediction of blasting toxic fumes and dilution ventilation. *Min Sci Technol* 1991;13:223–35. [https://doi.org/10.1016/0167-9031\(91\)91355-L](https://doi.org/10.1016/0167-9031(91)91355-L).
- [5] Mainiero R. A technique for measuring toxic gases produced by blasting agents. In: Proceedings of the annual conference on explosives; 1997. p. 1–10.
- [6] Mainiero RJ, Rowland JH, Harris ML, Sapko MJ. Behavior of nitrogen oxides in the product gases from explosive detonations. In: 32nd annual conference on explosives and blasting technique, vol. 2. Dallas, Texas: International Society of Explosives Engineers; 2006. p. 93–102.
- [7] Onederra I, Bailey V, Cavanough G, Torrance A. Understanding main causes of nitrogen oxide fumes in surface blasting. *Trans Institut Mining Metall Sec A Min Technol* 2012;121:151–9. <https://doi.org/10.1179/1743286312Y.0000000019>.
- [8] Rowland JH, Mainiero RJ. Factors affecting ANFO fumes production. In: Annual conference on explosives and blasting technique 2000; 2000. p. 163–74.
- [9] Sapko M, Rowland J, Mainiero R, Zlochower I. Chemical and physical factors that influence  $\text{NO}_x$  production during blasting - exploratory study. 28th annual conference on explosives and blasting technique, vol. II. Las Vegas, Nevada: International Society of Explosives Engineers; 2002. p. 317–30.
- [10] Zawadzka-Malota I. Testing of mining explosives with regard to the content of carbon oxides and nitrogen oxides in their detonation products. *J Sustain Mining* 2015;14:173–8. <https://doi.org/10.1016/j.jsm.2015.12.003>.
- [11] Harris ML, Sapko MJ, Mainiero RJ. Toxic fume comparison of a few explosives used in trench blasting. In: Proceedings of the annual conference on explosives and blasting technique, vol. II; 2003. p. 319–36.
- [12] Rowland JH, Mainiero R, Hurd DA. Factors affecting fumes production of an emulsion and ANFO/emulsion blend. In: 26th annual conference on explosives and blasting technique. Cleveland, OH: International Society of Explosives Engineers; 2000. p. 163–74.
- [13] Hernad M, Kugyela L. Risk of carbon monoxide intoxication in explosions. *Hadmernok* 2012;7:56–64.
- [14] Martel R, Trépanier L, Lévesque B, Sanfaçon G, Brousseau P, Lavigne MA, et al. Carbon monoxide poisoning associated with blasting operations close to underground enclosed spaces. Part 1. CO production and migrating mechanisms. In: An earth Odyssey, the international association of hydrogeologists. The Canadian Geotechnical Society; 2001. p. 371–82.
- [15] Ornellas DL. Calorimetric determinations of the heat and products of detonation of explosives: October 1961 to April 1982. 1982.
- [16] Chaiken RF, Cook EB, Ruhe TC. Toxic fumes from explosives: ammonium nitrate-fuel oil mixtures (No. BM-RI-7867). Pa: Pittsburg; 1974.
- [17] European Commission. Explosives for civil uses; high explosives; Part 16: detection and measurement of toxic gases; EN 13631-16. 2004.
- [18] Maranda A, Paszula J, Zawadzka-Malota I, Kuczyńska B, Witkowski W, Nikolczuk K, et al. Aluminum powder influence on ANFO detonation parameters. *Cent Eur J Energetic Mater* 2011;8:279–92.
- [19] Nyberg U, Klippmark V, Karlström H, Beyglou A, Petropoulos N. Short time measurements of toxic fumes from detonation of emulsion explosive. 2015.
- [20] Kamburova G. The influence of the oxygen balance on the chemical reaction of explosives. Vienna Conference Proceedings of European Federation of Explosive Engineers; 2007. p. 439–46.
- [21] Suceska M. EXPLO5 version V6.05 Users's guide. Hrochuv Tynec: Czech Republic: OZM Research; 2018.
- [22] Suceska M. EXPLO5 – computer program for calculation of detonation parameters. Karlsruhe, Germany. In: 32nd international annual conference of ICT; 2001. 110/1–110/13.
- [23] Suceska M, Ang HG, Serene Chan HY. Study of the effect of covolumes in BKW equation of state on detonation properties of CHNO explosives. *Propellants, Explos Pyrotech* 2013;38:103–12. <https://doi.org/10.1002/prep.201100150>.
- [24] Suceska M, Ang HG, Chan HY. Modification of BKW EOS introducing density-dependent molecular covolumes concept. *Mater Sci Forum* 2011;673:47–52. <https://doi.org/10.4028/www.scientific.net/MSF.673.47>.
- [25] Suceska M, Serene CHY, Ang H-G. Can the accuracy of BKW EOS be improved? 15th international detonation symposium, vol. 6. USA: San Francisco; 2014. p. 1247–56.
- [26] Suceska M. Calculation of thermodynamic parameters of combustion products of propellants under constant volume conditions using the virial equation of state. influence of values of virial coefficients. *J Energetic Mater* 1999;17: 253–78. <https://doi.org/10.1080/07370659908216107>.
- [27] Fried LE, Howard WM, Souers PC. Cheetah 2.0 user's manual. 1998.
- [28] Suceska M, Dobrilovic M, Bohanek V, Stimac B. Estimation of explosive energy output by EXPLO5 thermochemical code. *Zeitschrift Fur Anorganische Und Allgemeine Chemie* 2021;647:231–8. <https://doi.org/10.1002/zaac.202000219>.
- [29] Kozyrev NV. Reparametrization of the BKW equation of state for CHNO explosives which release no condensed carbon upon detonation. *Cent Eur J Energetic Mater* 2015;12:651–70.
- [30] Suceska M, Braithwaite M, Klapötke TM, Stimac B. Equation of state of detonation products based on exponential-6 potential model and analytical representation of the excess Helmholtz free energy. *Propellants, Explos Pyrotech* 2019;44. <https://doi.org/10.1002/prep.201800339>.
- [31] Mader CL. Numerical modeling of explosives and propellants. third ed. Boca Raton: CRC Press; 2007.
- [32] Fried LE, Howard WM. EXP6: a new equation of state library for high pressure thermochemistry. In: 12th international detonation symposium; 2002. p. 564–75.
- [33] Victorov SB, El-Rabii H, Gubin SA, Maklashova IV, Bogdanova YA. An accurate Equation-of-state model for thermodynamic calculations of chemically

- reactive carbon-containing systems. *J Energetic Mater* 2010;28:35–49. <https://doi.org/10.1080/07370652.2010.491496>.
- [34] Minchinton A. On the influence of fundamental detonics on blasting practice. In: 11th international symposium on rock fragmentation by blasting; 2015. p. 41–54.
- [35] Chan SK. Prediction of confinement effects on detonation with an analytical two-dimensional model. In: 13th international detonation symposium; 2006. p. 224–32. Norfolk, vol. A.