

Development of a geological model of the thermal spring area in Daruvar using geophysical research

Kosović, Ivan; Briški, Maja; Pavić, Mirja; Padovan, Božo; Pavičić, Ivica; Matoš, Bojan; Pola, Marco; Borović, Staša

Source / Izvornik: **Knjiga sažetaka = Book of abstracts / 7. hrvatski geološki kongres s međunarodnim sudjelovanjem, 2023, 89 - 90**

Conference paper / Rad u zborniku

Publication status / Verzija rada: **Published version / Objavljena verzija rada (izdavačev PDF)**

Permanent link / Trajna poveznica: <https://urn.nsk.hr/urn:nbn:hr:169:326159>

Rights / Prava: [In copyright](#) / [Zaštićeno autorskim pravom.](#)

Download date / Datum preuzimanja: **2024-07-07**



Repository / Repozitorij:

[Faculty of Mining, Geology and Petroleum Engineering Repository, University of Zagreb](#)





Slika 1. Pregledna geotektonska karta s označenim područjem planiranih istraživanja (crveni okvir)

aju interpretirati najnoviji 2D seizmički profili odobreni od strane Agencije za ugljikovodike (AZU), reinterpretirati gravimetrijski podatci, definirati glavni rasjedi te 3D modelirati geometrija odabranih solnih struktura. Strukturno-tektonski sklop (re)definirat će se na pučinskim otocima srednjeg Jadrana (slika 1). Uspoređivanjem prostornog rasporeda epicentara i hipocentara zabilježenih potresa s interpretiranim geološkim strukturama, pokušat će se razjasniti povezanost aktivne tektonike sa solnim strukturama. Istraživanjem i datiranjem najmlađih (kvartarnih) naslaga pokušat će se definirati neotektonska aktivnost solnih dijapira. Istraživanjem odabranih markantnih (sub)recentnih erozijskih oblika nastojat će se procijeniti prošla i buduća seizmotektonska aktivnost i seizmogeohazardi.

Projekt prijavljen na natječaj Hrvatske zaklade za znanost pod brojem IP-2022-10-6274.

DEVELOPMENT OF A GEOLOGICAL MODEL OF THE THERMAL SPRING AREA IN DARUVAR USING GEOPHYSICAL RESEARCH

IZRADA GEOLOŠKOG MODELA TERMALNOG IZVORIŠTA U DARUVARU KORIŠTENJEM GEOFIZIČKIH ISTRAŽIVANJA

Kosović Ivan^{1*}, Briški Maja¹, Pavić Mirja¹, Božo Padovan³, Pavičić Ivica², Matoš Bojan², Pola Marco¹, Borović Staša¹

¹ Croatian Geological Survey, Sachsova 2, 10 000 Zagreb, Croatia

² University of Zagreb, Faculty of Mining, Geology and Petroleum Engineering, Pierottijeva 6, 10 000 Zagreb, Croatia

³ Terra Compacta Ltd., Psunjska 3, 10 000 Zagreb, Croatia

*corresponding author: ikosovic@hgi-cgs.hr

Keywords: *ERT, Daruvar hydrothermal system, fault architecture, carbonate complex*

Geothermal energy is one of the renewable energy sources foreseen in the European Union's plans for the green energy transition. Its sustainable utilisation mostly depends on the characteristics of the geothermal resource from which it is extracted. Among others, detailed geological modelling and reconstruction of the subsurface is a key factor for estimating the potential of a geothermal resource. In particular, it is crucial to determine the geometry of faults and fractures since the associated highly permeable damage zones represent a preferential pathway for the circulation of thermal fluids and their uprising (BENSE *et al.*, 2013; FAULDS *et al.*, 2013).

This research focuses on the modelling and reconstruction of the geological and structural settings in the Daruvar

thermal spring area using surface geophysical techniques. Electrical resistivity tomography (ERT) was employed to delineate the geometry of resistivity layers in the subsurface. The ERT results were combined with an integrated approach based on the passive Horizontal to Vertical Spectral Ratio (HVSr) method and the active Multichannel Analysis of Surface Waves (MASW) method to map the thickness of the Quaternary cover. The geophysical data were constrained using the stratigraphic logs of wells in the spring area and its surroundings obtaining a 3D reconstruction of the geological setting.

The spatial distribution of resistivity shows relatively low values from 10 to 150 Ωm (Fig. 1). Based on ERT results and the stratigraphic logs of the wells, three resistivity layers/geological units were identified (Fig. 1): (1) the Quaternary alluvial cover with resistivity ranging between 30 and 50 Ωm (layer 1); (2) the Neogene sediments with

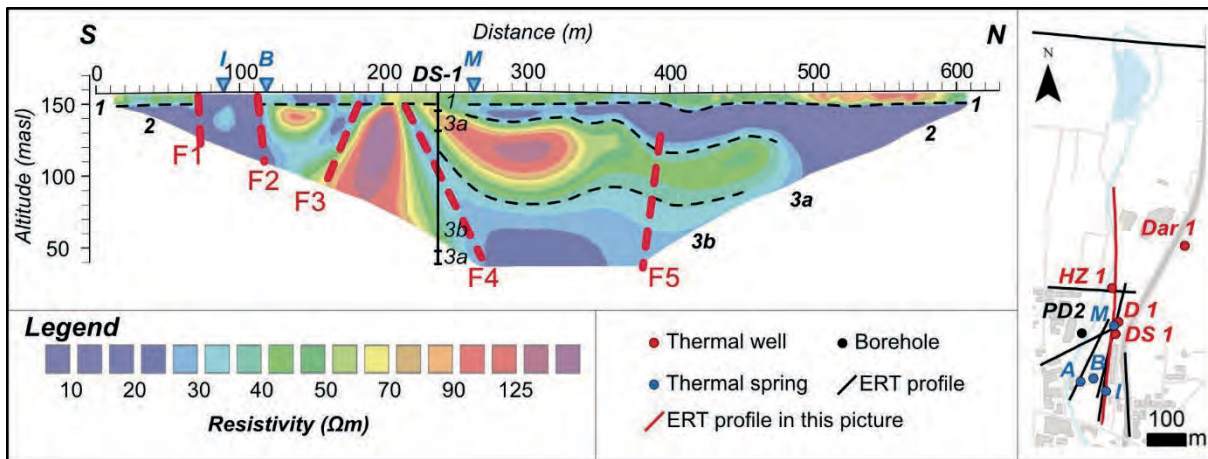


Figure 1. Inverse resistivity model of ERT profile conducted with 10 m spacing between electrodes. The ERT profile shows a general overview of the resistivity distribution in the Daruvar spring area. Dashed red lines (F1-F5) indicate fault zones characterised by low resistivities. The map shows the traces of ERT profiles (lines) conducted in the study area and the locations of springs and boreholes (dots) used for geological reconstruction. The ERT profile shown in this picture is marked by the red line.

resistivity values of 10–30 Ωm (layer 2); and (3) the Triassic dolomites that were divided in a compact layer with resistivity ranging from 70 to 150 Ωm (layer 3a) and a fractured layer characterised by resistivity values of 20–30 Ωm (layer 3b). Furthermore, sharp lateral variations in the resistivity distributions were observed. They were generally marked by low resistivity anomalies that were interpreted as the fracture zones along the faults (F1 to F5; Fig. 1). The high secondary porosity of the fault zones and the occurrence of thermal waters decrease the bulk resistivity of the rock mass.

The obtained results allowed us to reconstruct the geological setting of the Daruvar thermal spring area. The Quaternary cover has a 5 to 15 m thickness, increasing northward and eastward. Its thickness and geometry were confirmed by seismic investigations. Neogene deposits are

generally found below the alluvial cover, except for the central part of the study area where the Carbonate complex, i.e., Triassic dolomites are found. Local scale faults and their fracture zones enhance the upwelling of thermal waters resulting in the occurrence of thermal springs with temperatures up to 48 °C (BOROVIĆ *et al.*, 2019). Two main faults border southward and eastward of the thermal spring area juxtaposing the highly permeable Triassic dolomites with the low permeable Neogene deposits. This lateral contrast fosters the rising of the thermal waters forming a shallow thermal resource in the Daruvar area.

Presented research has been conducted in the scope of the project “Multidisciplinary approach to hydrothermal system modelling” (HyTheC) funded by the Croatian Science Foundation under grant number UIP-2019-04-1218.

BENSE, V.F., GLEESON, T., LOVELESS, S.E., BOUR, O., SCIBEK, J. (2013): Fault Zone Hydrogeology. *Earth-Science Review*, 127, 171–192.

BOROVIĆ, S., POLA, M., BAČANI, A., URUMOVIĆ, K. (2019): Constraining the Recharge Area of a Hydrothermal System in Fractured Carbonates by Numerical Modelling. *Geothermics*, 82, 128–149.

FAULDS, J.E., HINZ, N.H., DERING, G.M., SILER, D.L. (2013): The Hybrid Model – The Most Accommodating Structural Setting for Geothermal Power Generation in the Great Basin, Western USA. *Transactions – Geothermal Resources Council*, 37, 3–10.